LED PRO

Simple & Flexible Solution

LED
FLEXIBLE
LINEAR LIGHT

▌ PRODUCT INFORMATION

- Excellently anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products against from harsh environments.

▌ BENEFITS

- Vivid light color.
- Less maintenance cost and less concerns.

▌ FEATURES

- High CRI>95.
- Operating voltage DC24V.

illus
illumination

BEYOND LIGHT..
TO THE LAST DETAILS!

AREAS OF APPLICATION

Hospitality

Shopping Center

Commercial

Educational Center

TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP67 (silicon extrusion <hollow version>with 3M tape at back)
Power	10W
LED Quantity	128pcs/meter
Lumen	950lm/M+/-10%
PCB	Double PCB whole thickness 0.25mm, white color, 10mm, copper thickness 25um x 3pcs (3OZ)
Chip Size	2.8x3.5x0.8mm
L70	>20000H
Input	DC24V
Maximum Length	5M/Reel
Cutting Unit	Each 16 led is cuttable (cutting space 12.5cm)
Packging	Male & female DC connector, 5m/reel into a anti-static bag, 20 bags into a master carton

SPECIFICATIONS

| Code No.	Model No.	Lumen	CRI	CCT
611888	ILS10LVST92250TN02	950lm	95	2200K/5000K

DIMENSIONS

5mm

500mm

12.0mm 12.0mm

12.5mm
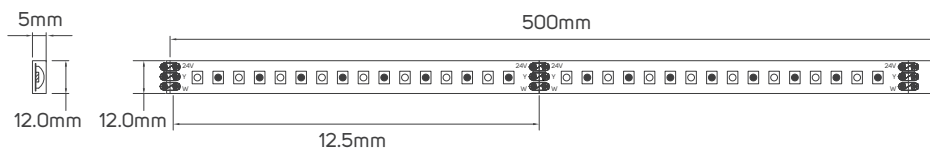
611888

ACCESSORIES

LED FLEXIBLE LINEAR LIGHT CONNECTOR
AVAILABLE AS AN ACCESSORY

| Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
611944	ILSLVRFDIMMCD01	20	144W	DC24V	DC24V	433.92Hz	40x85x6mm
611948	ILS75W24VCG01	20	75W	AC220-240V	DC24V	50/60Hz	78x110x36mm
611949	ILS100W24VCG01	20	100W	AC220-240V	DC24V	50/60Hz	98x130x41mm
611950	ILS150W24VCG01	20	150W	AC220-240V	DC24V	50/60Hz	98x160x50mm

ACCESSORIES DIMENSIONS
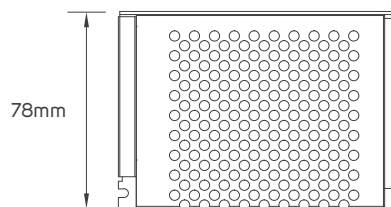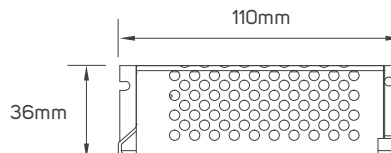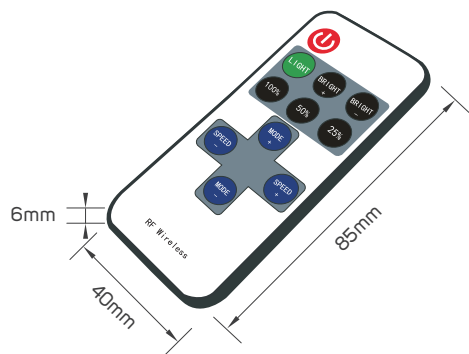
611944

611948
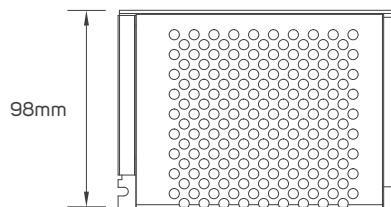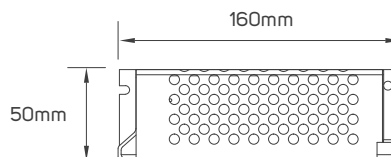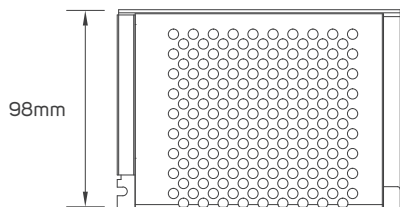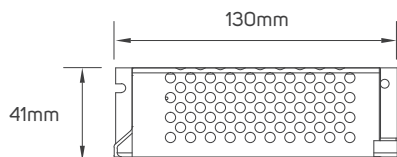
611949

611950

This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED
FLEXIBLE
LINEAR LIGHT

**BEYOND LIGHT..
TO THE LAST DETAILS!**

illus
illumination