

■≢ PRO

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

| PRODUCT INFORMATION

- Excellently anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products against from harsh environments.

BENEFITS

- Vivid light color.
- Less maintenance cost and less concerns.

FEATURES

- High CRI>95.
- Operating voltage DC24V.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA

LED Quantity	60pcs/meter
PCB	Double PCB whole thickness 0.25mm, white color, 10mm, copper thickness 25um x 3pcs (30Z)
Chip Size	5.0x5.0x1.2mm
L70	>20000H
Color Temp	RGB
Input	DC24V
Maximum Length	5M/Reel
Cutting Unit	Each 6 led is cuttable (cutting space 10cm)
Packging	Male & female DC connector, 5m/reel into a anti-static bag, 20 bags into a master carton

SPECIFICATIONS

Code No.	Model No.	IP	Power	CCT
611892	ILS10LVSTRGB02	67	10W	RGB

DIMENSIONS





611892

ACCESSORIES LED FLEXIBLE LINEAR LIGHT CONNECTOR AVAILABLE AS AN ACCESSORY

Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
612309	ILSLVST1HFC03						17x150x7mm
612312	ILSLVST2HFC05						17x27x7mm
612310	ILSLVST2HFC06						17x150x7mm
611945	ILSLVRFRGBCD01	20	144W	DC24V	DC24V	433.92Hz	40x85x6mm
611948	ILS75W24VCG01	20	75W	AC220-240V	DC24V	50/60Hz	78x110x36mm
611949	ILS100W24VCG01	20	100W	AC220-240V	DC24V	50/60Hz	98x130x41mm
611950	ILS150W24VCG01	20	150W	AC220-240V	DC24V	50/60Hz	98x160x50mm


ACCESSORIES DIMENSIONS







612309 - 612310 612312






611945 611948





611949 611950

APPLICATION PICTURE

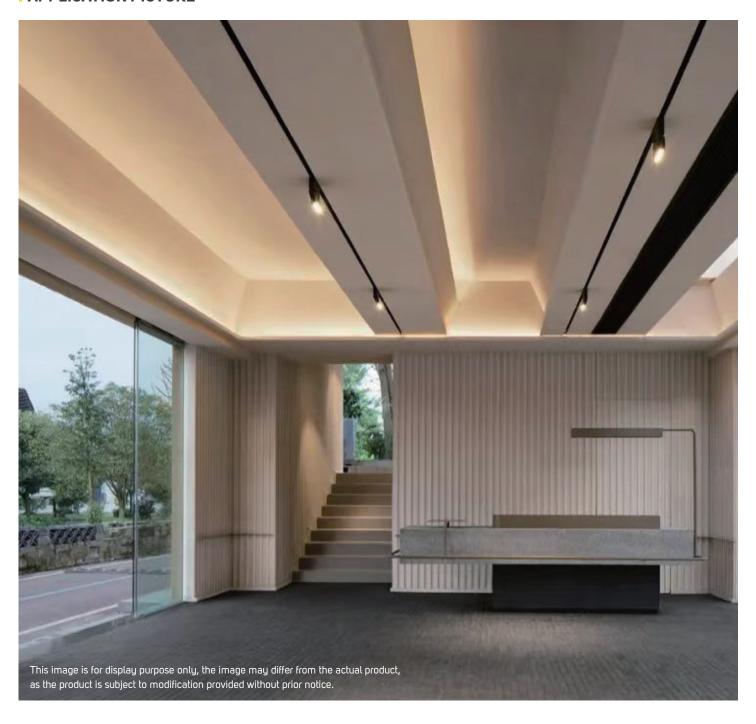

LED FLEXIBLE LINEAR LIGHT BEYOND LIGHT..
TO THE LAST DETAILS!

