



For every project, where light really matters

LED MODULE LUMINAIRE (MR16) SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED MODULE Luminaire (MR16) gives the customer the flexibility to choose between 12 models based on their specific need with lumen package from 420 lm to 1200 lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

FEATURES

- High CRI>95.
- Efficacy up to 95 lm/w.
- Long life span 30,000hrs.
- Operating voltage AC220-240V.
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center





TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratings	IP65
Body Color	Dark Grey
Body Material	Aluminum
Lumen	from 420 to 1200 lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Beam Angle	24°
Dimming	Non-Dimmable
Lamp Type	Direct
Fixed or Adjustable	Fixed
Life Span	30,000hrs

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
614083	ILS5.3MR16M927WW01	5.3W	420lm	79.25lm/W	2700K
614084	ILS5.3MR16M930WW01	5.3W	440lm	83.02lm/W	3000K
614085	ILS5.3MR16M940NW01	5.3W	460lm	86.79lm/W	4000K
614086	ILS5.3MR16M950DL01	5.3W	480lm	90.57lm/W	5000K

DIMENSIONS





614083 - 614084 - 614085 - 614086

ACCESSORIES

Code No.	Model No.	Power	Frequency	Body Color	Body Material
614087	ILSACD6WMLD01	6W	50/60Hz	white	PVC+copper

ACCESSORIES DIMENSIONS

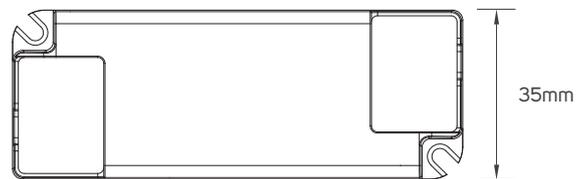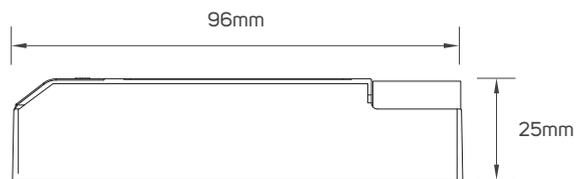


614087 - Driver

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
614088	ILS10MR16M927WW01	10W	800lm	80lm/W	2700K
614089	ILS10MR16M930WW01	10W	850lm	85lm/W	3000K
614090	ILS10MR16M940NW01	10W	900lm	90lm/W	4000K
614091	ILS10MR16M950DL01	10W	950lm	95lm/W	5000K

DIMENSIONS

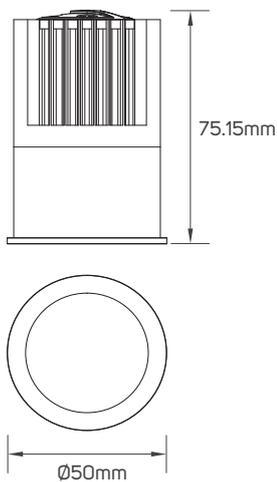


614088 - 614089 - 614090 - 614091

ACCESSORIES

Code No.	Model No.	Power	Frequency	Body Color	Body Material
614092	ILSACD10WMLD01	6W	50/60Hz	white	PVC+copper

ACCESSORIES DIMENSIONS


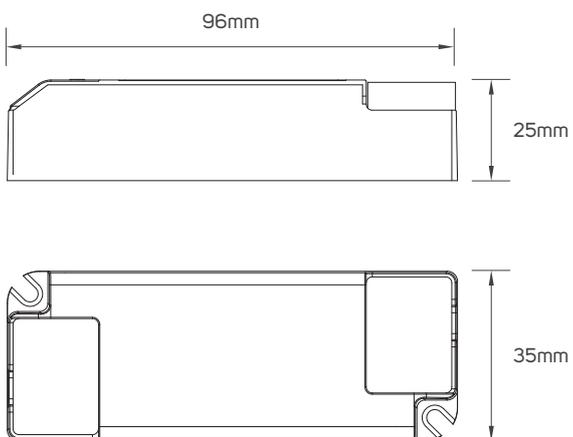


614092 - Driver

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
614093	ILS13MR16M927WW01	13W	1000lm	76.92lm/W	2700K
614094	ILS13MR16M930WW01	13W	1050lm	80.77lm/W	3000K
614095	ILS13MR16M940NW01	13W	1110lm	85.38lm/W	4000K
614096	ILS13MR16M950DL01	13W	1200lm	92.31lm/W	5000K

DIMENSIONS





614093 - 614094 - 614095 - 614096

ACCESSORIES





Code No.	Model No.	Power	Frequency	Beam Angle	Body Color	Body Material
614097	ILSACD15WMLD01	15W	50/60Hz	/	white	PVC+copper
614098	ILS15DGMR16LEN01	/	/	15°	transparent	PC
614099	ILS24DGMR16LEN01	/	/	24°	transparent	PC
614100	ILS36DGMR16LEN01	/	/	36°	transparent	PC
614101	ILSMR16HC01	/	/	/	black	PC

ACCESSORIES DIMENSIONS

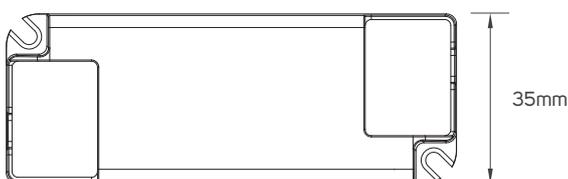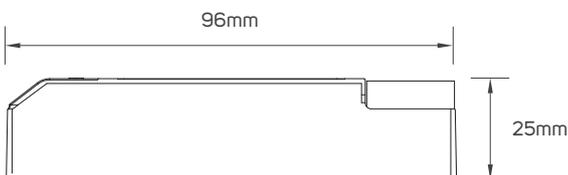

614097 - Driver


ACCESSORIES DIMENSIONS



614098 - 614099 - 614100 - Lens

614101 - HC

APPLICATION PICTURE

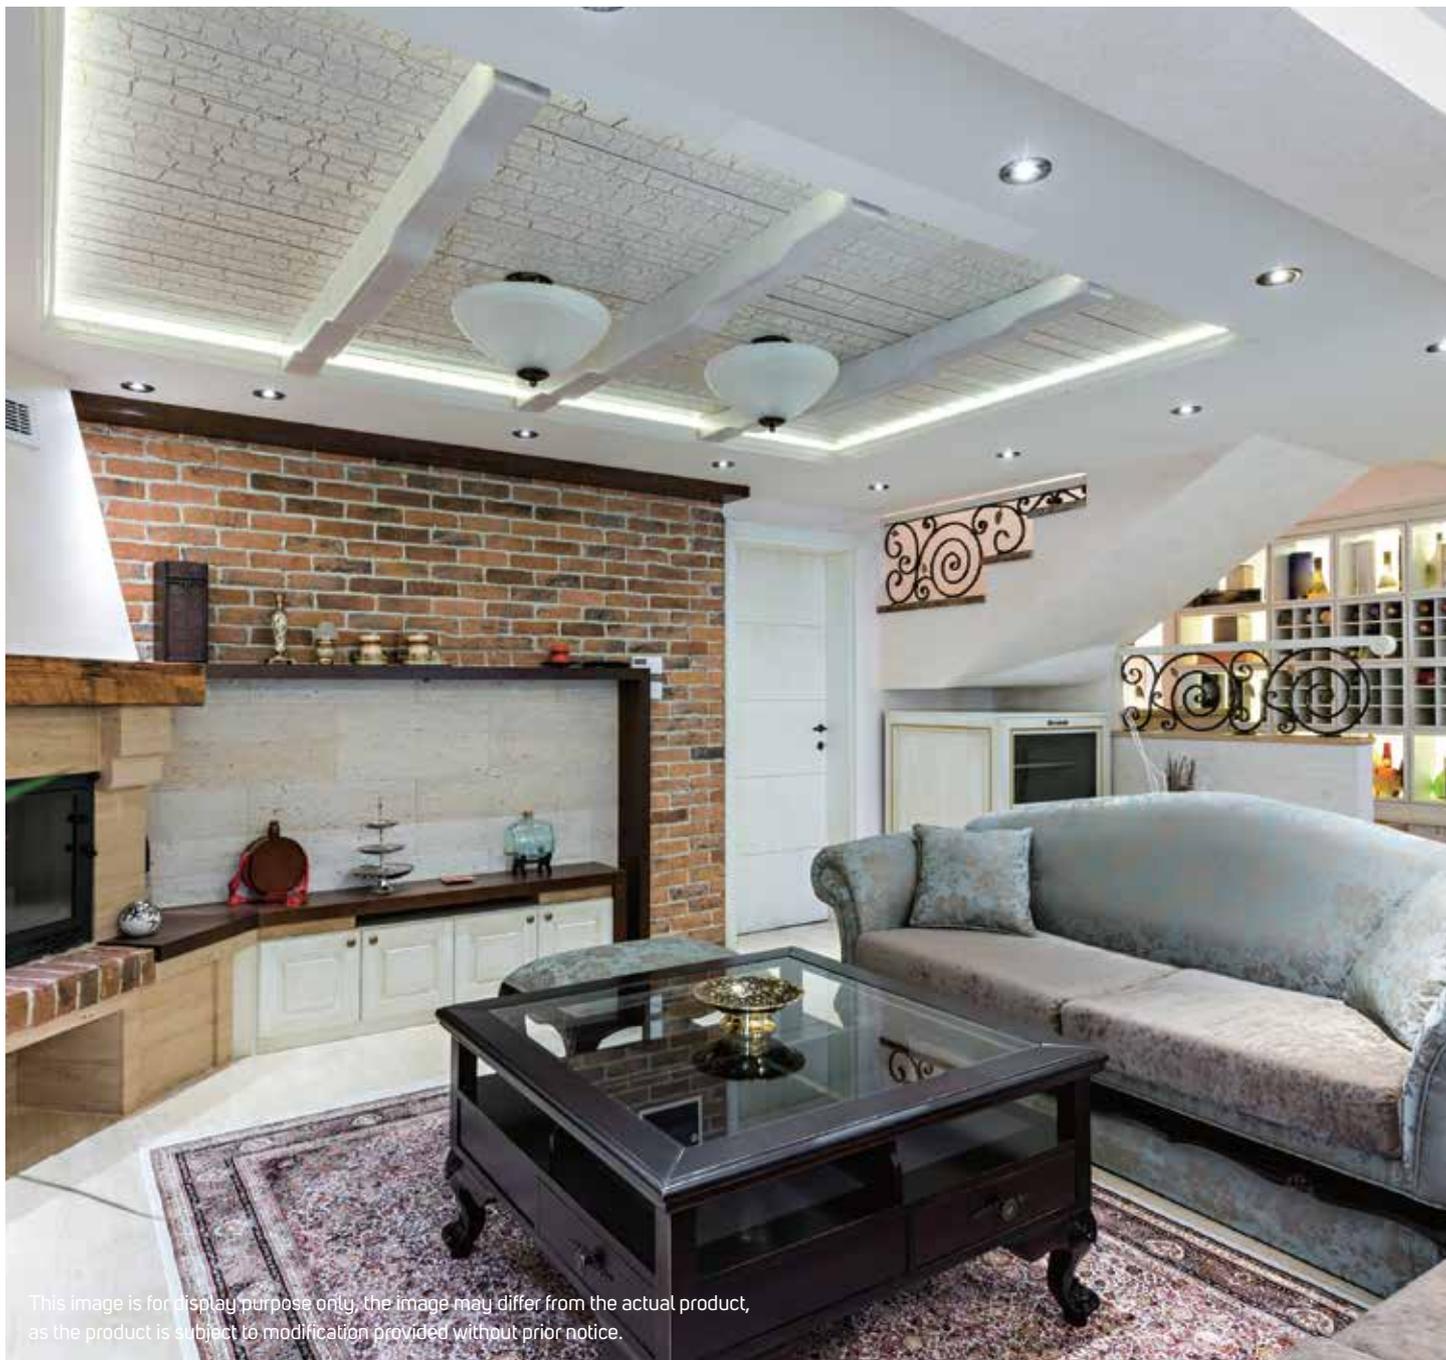

This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED MODULE LUMINAIRE (MR16) SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.