



LED PRO

Simple & Flexible Solution

LED FLEXIBLE LINEAR LIGHT

PRODUCT INFORMATION

- Excellently waterproof and anti-dust LED strips with professional design to guarantee lighting performance.
- It not only ensure high quality of lighting color consistency but also protect products outdoor against from harsh environments outdoors.

BENEFITS

- Water proof and vivid light color.
- Less maintenance cost and less concerns on water invasion.

FEATURES

- High CRI>92.
- Operating voltage DC226V.

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

LED quantity	72pcs/meter
PCB	single PCB whole thickness 0.15mm, white color, 8mm, copper thickness 25um.
Chip size	5.0x5.0x1.2mm
L70	>20000H
Input	DC226V
Copper wire	0.18mmx28pcs
Maximum length	40 meters
Cutting unit	1 meter cuttable
Size	26x15mm
Other features	w/o RGB controller, sold separately

SPECIFICATIONS

Code No.	Model No.	IP	Power	CCT
611841	ILS08HVNFRGB01	65, PVC	8W/M	RGB

DIMENSIONS

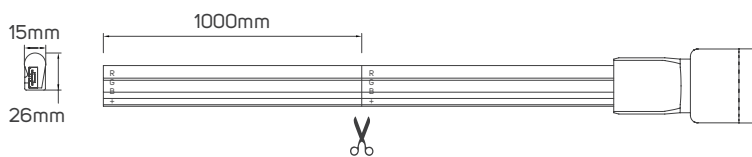


611841

ACCESSORIES


LED FLEXIBLE LINEAR LIGHT CONNECTOR
AVAILABLE AS AN ACCESSORY

Code No.	Model No.	IP	Power	Input	Output	Frequency	Dimensions
611951	ILSHVNFALMFCH02						1000x18.79x20mm
611935	ILSHVNF2HFC02						L=200mm
611971	ILSHVNF2HFC01						L=300mm
611941	ILSHVRFRGBCD01	65	361W	DC226V	DC226V	433.92MHz	35x132x33mm
611929	ILS250HVFLLCG02	65	248W	AC220-240V	DC226V	50/60Hz	42x146x33mm
611930	ILS400HVFLLCG02	65	361W	AC220-240V	DC226V	50/60Hz	42x146x33mm


ACCESSORIES DIMENSIONS




611951 - Aluminum Profile



611935 - Jumper




611941 - RGB Controller



611971 - Jumper



611929 - 611930 - Flicker-free driver

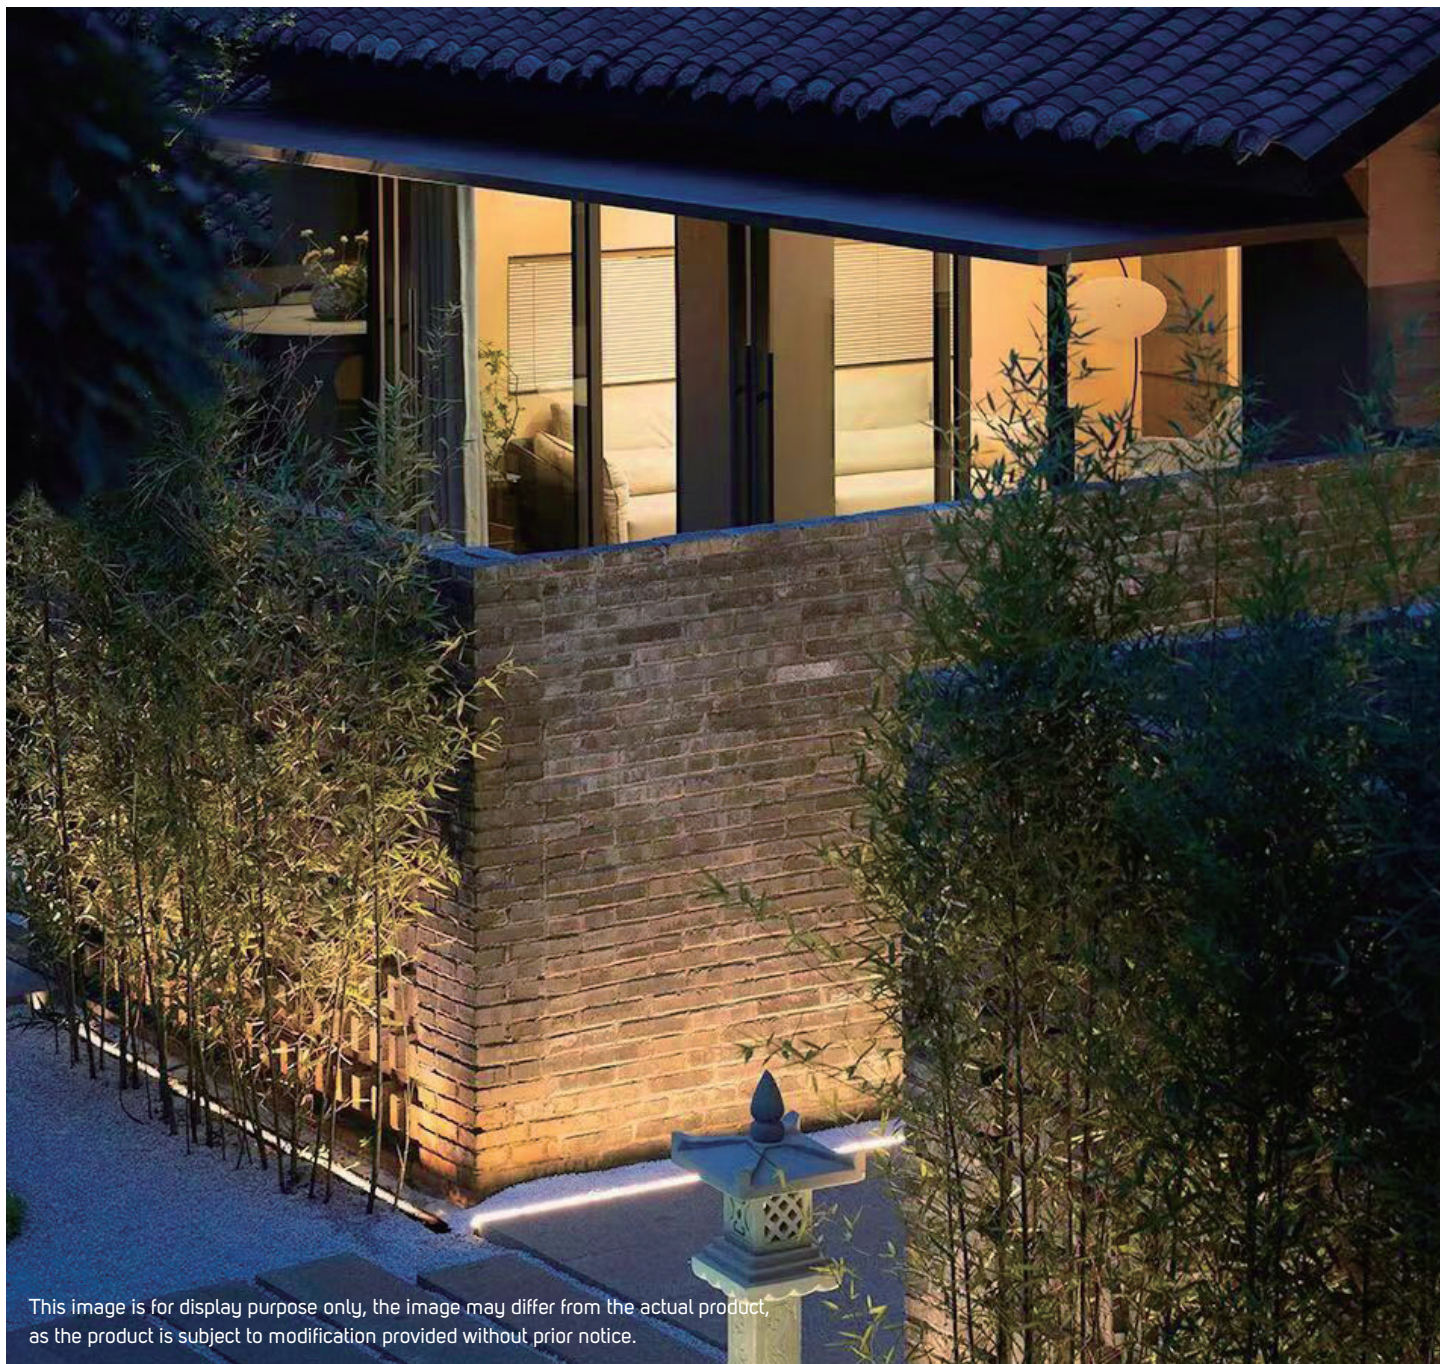

This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED FLEXIBLE LINEAR LIGHT

**BEYOND LIGHT..
TO THE LAST DETAILS!**

